



Flipdown Monitor Installation

Flipdown Monitor Installation Master sheet

Car Video entertainment Installation Instructions

Important

If you have any questions please call before beginning installation.

Installation of flip down monitor

Step 7 - Carefully route your wire

Using the equipped wiring, run your wire from the base of the pillar cover through the headliner to the flip down monitor. Then carefully mount the bracket using screws that are short enough not to penetrate the roof of the vehicle. Again verify that the bracket is mounted in the center of the vehicle and exactly square.



Step 8 - Secure wire through pillar

As seen in this picture, it is important to secure the wire in such a way that it doesn't become pinched when the monitor is reinstalled. Use cable or wire ties to tie wire in desired places. Allow a little slack so that when panels are reinstalled wires have room to flex to prevent damage.




Step 9 - Mount the monitor


Using the wire enclosed connect the dome light wires to the appropriate wire. In some instances the dome light will not be in the area of desired mounting. If this is the case, you will need to run a couple of wires from the closest dome light in order to supply the dome light power. Please consult your wiring diagram for proper hook up of the dome light. Once completed, nicely tuck the wires away from the screw holes to prevent damage when mounting the monitor. Now, carefully screw the monitor in using the enclosed hardware. **DO NOT OVERTIGHTEN THE SCREWS** as it will distort the monitor possibly breaking it or preventing it from closing properly. Damaged units are not eligible for warranty repair or replacement.




Tools necessary to complete Installation.

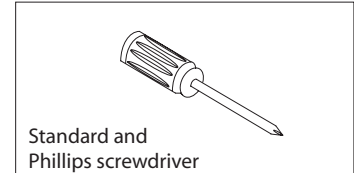


Standard and Phillips screwdriver

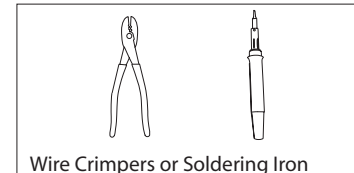

Wire Crimpers or Soldering Iron

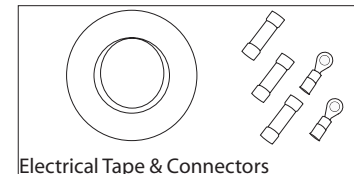

Electrical Tape & Connectors

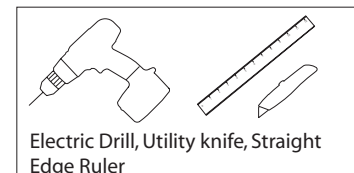

Electric Drill, Utility knife, Straight Edge Ruler