



# Flipdown Monitor Installation

## Flipdown Monitor Installation Master sheet

### Car Video entertainment Installation Instructions


#### Important

If you have any questions please call before beginning installation.

Installation of flip down monitor

#### Step 4 - Carefully cut the headliner

Using the traced line, carefully cut the factory headliner using a new razor blade. Be extremely careful, it is easy to slip and cut yourself and the headliner. Slowly proceed to cut the headliner completely through, cutting the corners square. Be careful not to cut any factory wires, or wiring harnesses that are mounted in the ceiling.



#### Step 5 - Verify cross brace

As seen in this picture, the roof support crosses the mounting area. If a roof support is not in the area of desired mounting, you can glue a wood rail to the roof of the vehicle using epoxy, or silicone.




#### Step 6 - Drill mounting holes through bracket


Using a ruler, space the mounting holes on the bracket evenly. At minimum there must be three screws holding the mounting plate to the ceiling of the vehicle. Using a sharp drill bit or nibbler to drill your mounting holes. Make sure that the holes are drilled in such a fashion that they are centered on the cross brace not to one end.




#### Tools necessary to complete Installation.

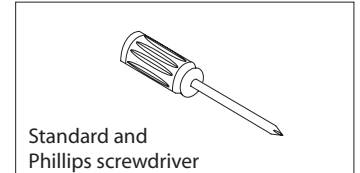


Standard and Phillips screwdriver

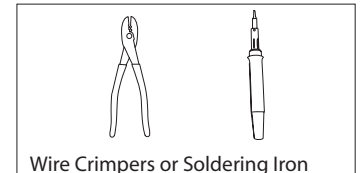

Wire Crimpers or Soldering Iron

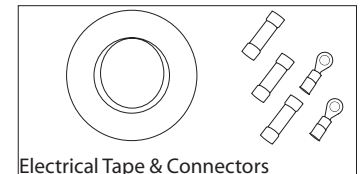

Electrical Tape & Connectors

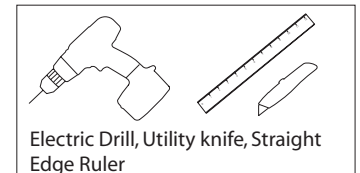

Electric Drill, Utility knife, Straight Edge Ruler